

SONY

SNC-VM772R

Network Mini Dome 4K Camera

4K Outdoor IR Ruggedized Camera with Large-sized Exmor R™ CMOS Sensor



4K

SALES POINTS

- Extraordinary sensitivity to capture detail-packed 4K video footage, even in near darkness
- Automatic selection of picture settings to provide the best picture quality for the scene, 24 hours a day
- A variety of signal outputs with 4K technology to see everything and miss nothing in every scene

NEW FEATURES

Extraordinary sensitivity with 4K

- 4K/30 fps video footage at a minimum illumination of 0.06 lx thanks to the Exmor R, 20 megapixel large-sized 1.0-type back-illuminated CMOS sensor, high-speed image processing engine, and high-quality zoom lens, allowing you to capture detail-packed 4K video footage, even in near darkness




Automatic selection of picture settings

- Intelligent Scene Capture to automatically select the best picture settings, responding to environments such as whether, time, and lighting conditions and providing the best picture quality for the scene; and to support all of your varying operating conditions and picture preferences, manual setting modes (picture parameters are manually adjusted) and a scheduling function (predefined picture settings are recalled from memory according to time schedules, external triggers, and lighting conditions)

A variety of signal outputs


- Intelligent Coding to keep specific areas of interest in the scene clear and crisp, while lowering the image quality of the other parts with a high compression ratio, allowing the overall bitrate for the entire image to be reduced by up to 50% (4K/30 fps, areas of interest 30%) and minimizing storage costs

Captured Image 4K

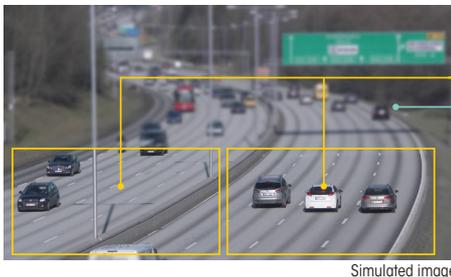

Intelligent Coding

- Intelligent Cropping to simultaneously observe specific areas of interest in any captured images with a 4K-native resolution, while overviewing the entire image with a lower Full HD resolution, allowing the network bandwidth to be reduced by up to 50% and minimizing storage costs

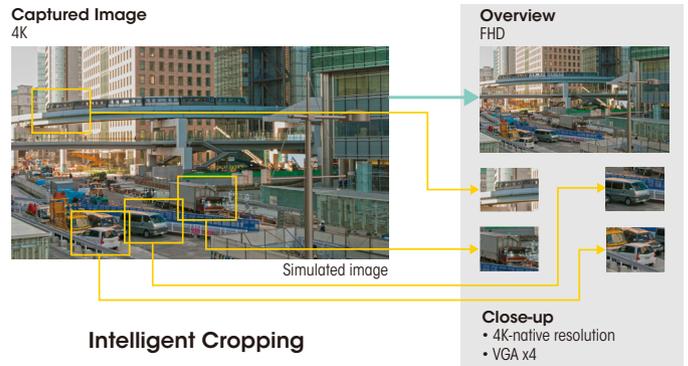

Intelligent Cropping

- Multi Tracking to automatically chase objects specified by the Intelligent Coding or Intelligent Cropping function – a compelling alternative to conventional monitoring that requires multiple PTZ cameras to track several objects simultaneously
- Evidence Shot for high-quality still-image recording with 20 megapixel resolution to examine the scene and produce evidence – ideal for collection and analysis of high-quality evidence in situations like city streets and car parks

OTHER KEY FEATURES

- Built-in IR (infrared) illuminators • Adaptive IR • IK10 • IP66
- Edge Storage (onboard recording with memory cards)
- View-DR – 90 dB wide dynamic range
- Visibility Enhancer (VE) • True D/N (Day/Night)
- Supports VBR (variable bit rate) with cap or CBR selectable
- Powered by either IEEE 802.3af-compliant (PoE) Class 3 system, DC 12 V \pm 10%, or AC 24 V \pm 20%
- DEPA Advanced Intelligent Video Analytics • Defog Image Processing
- Highlight Compensation • Optical Image Stabilizer
- SNC toolbox mobile for adjustment of field of view with a smartphone or tablet PC
- HDMI interface support
- ONVIF (Open Network Video Interface Forum) Profile S firmware




IPELA

SPECIFICATIONS

SNC-VM772R	
Camera	
Image Sensor	1.0-type progressive scan Exmor R CMOS sensor
Number of Effective Pixels	Approx. 20 Megapixels
Sync System	Internal synchronization
Minimum Illumination (50 IRE)	Color: 0.1 lx (F1.8, 1/30 s) B/W: 0 lx (IR LED On, F1.8, 1/30 s)
Minimum Illumination (30 IRE)	Color: 0.06 lx (F1.8, 1/30 s) B/W: 0 lx (IR LED On, F1.8, 1/30 s)
Dynamic Range	Equivalent to 90 dB with View-DR Technology
Gain	Auto/Manual (0 dB to +48 dB)
Shutter Speed	1/1 s to 1/10,000 s
Exposure Control	Exposure compensation, AGC, Shutter speed, Iris
White Balance	ATW, ATW-PRO, Fluorescent lamp, Mercury lamp, Sodium vapour lamp, Metal halide lamp, White LED, One push WB, Indoor, Outdoor, Manual
lens	Built-in zoom lens
Easy Zoom	Yes
Zoom Ratio	Optical zoom 2.9x Clear image zoom 2.0x Digital zoom 2.0x Total zoom 11.6x
Easy Focus for Setup	Yes
Horizontal Viewing Angle	70.7° to 27.5° (16:9 aspect ratio) 76.6° to 29.8° (3:2 aspect ratio)
Vertical Viewing Angle	39.9° to 15.7° (16:9 aspect ratio) 51.5° to 20.1° (3:2 aspect ratio)
Focal Length	f = 8.8 mm to 25.7 mm
F-Number	F1.8 (Wide) to F2.8 (Tele)
Minimum Object Distance	300 mm
Parv/Tilt/Rotation Angle (manual)	±192° -10° to +81° -100° to +100°
IR Illuminator	Yes Wave length (typical): 850 nm, IR LED: 30 pieces
IR Working Distance	50 m (164.0 feet) (30 IRE)
Camera Features	
Day/Night	True D/N
Day/Night linked with Easy Focus	Yes
e-Flip	Yes
Wide-D	View-DR
Tone Correction	Visibility Enhancer
Defog Image Processing	Yes
Highlight Compensation	Yes
Flicker Reduction	Yes
Distortion Correction	Yes
Noise Reduction	XDNR
Image Stabilizer	Optical
Intelligent Scene Capture	Yes
Privacy Masking (number)	24
Privacy Masking (shape)	Quadrangle formed by any four corner points
Privacy Masking (color/effect)	Opaque 14 colors (Black, White, Red, Green, Blue, Cyan, Yellow, Magenta, Gray (6 scales)), Mosaic
Edge Storage	Yes
Vandal Resistant	IK10
Ingress Protection	IP66
Superimpose Number	4 independent positions for characters (Codec, Date & Time, Event, Text (Max. 64 characters)), 1 independent position for a logo mark
Superimpose Language	English
Menu Language	English, Japanese, Chinese (simplified), Chinese (traditional), French, Spanish, German, Italian, Korean, Portuguese, Russian, Arabic, Hindi, Vietnamese, Thai, Turkish, Polish
Video	
Resolution	5472 x 3648, 3840 x 2160, 2880 x 2160, 1920 x 1080, 1440 x 1080, 1440 x 960, 1280 x 720, 960 x 720, 640 x 480, 640 x 360, 320 x 240, 320 x 180
Compression Format	H.264 (High/Main Profile), JPEG H.264 (B-picture) is supported for 3840 x 2160 and 2880 x 2160 resolution
Maximum Frame Rate	H264: 30 fps (3840 x 2160)/10 fps (1920 x 1080) JPEG: 2.5 fps (5472 x 3648)
Bitrate Compression Mode	CBR/VBR with Cap (selectable)
Range of Bit Rate Setting	64 Kbps to 32 Mbps
Intelligent Cropping (Mode)	Dynamic/Static
Intelligent Cropping (Number)	2 (1920 x 1080), 4 (640 x 480)
Intelligent Coding (Mode)	Auto/Manual
Intelligent Coding (Number)	Up to 8 (up to 4 for Auto mode)
Evidence Shot	20 Megapixels (5472 x 3648)
Multi Streaming Capability	Yes (5)
Number of Clients	20
Intelligent Video/Audio Analytics	
Analytics Architecture	DEPA Advanced
Intelligent Motion Detection	Yes
Face Detection	Yes
Tamper Alarm	Yes
Scene Analytics	Intrusion, Passing, Existing, Disappearance, Capacity, Left object, Removed object
Multi Tracking	Up to 4

SNC-VM772R	
Audio	
Compression Format	G.711 (bit rate: 64 kbps, sampling frequency: 8 kHz) G.726 (bit rate: 40, 32, 24, 16 kbps, sampling frequency: 8 kHz) AAC-LC (bit rate: 64 kbps, sampling frequency: 16 kHz) AAC-LC (bit rate: 128 kbps, sampling frequency: 48 kHz)
System Requirements	
Operating System	Windows 7 (32/64 bit) Ultimate, Professional Edition, Windows 8 Pro (32/64 bit), Windows 8.1 Pro (32/64 bit)
Processor	Intel Core i7 3.4GHz or higher* *For 4K (3840 x 2160) output of 30 fps, a GPU capable of 3840 x 2160 resolution and decoding 4K/H.264 is required.
Memory	8 GB or more
Web Browser	Microsoft Internet Explorer Ver. 8.0, Ver. 9.0, Ver. 10.0, Ver. 11.0 Firefox Ver. 29.0 Safari Ver. 5.34 Google Chrome Ver. 39.0
SNC toolbox	Yes
SNC toolbox mobile	Yes
Network	
Protocols	IPv4, IPv6, TCP, UDP, ARP, ICMP, ICMPv6, IGMP*, MLD*, HTTP, DHCP, DHCPv6, DNS, NTP, RTP/RTCP, RTSP over TCP, SMTP (client), HTTPS, FTP (client), SNMP (v1, v2c, v3), TLS (v1.0) *SSM (Source Specific Multicast) is supported.
Number of IP Address/Mac ADDRESS	1
QoS	DSCP
Multicast Streaming Support	Yes
ONVIF Conformance	Profile S
Wireless Network	Yes for setup (IEEE802.11b/g/n with optional IFU-WLM3)
Authentication	IEEE802.1X
Interface	
Analog Video Output	No
Analog Monitor Output for Setup	No
Digital Video Output	HDMI (Type A) x1
Microphone Input	Mini jack (monaural, 2.2 kΩ, plug-in-power)
Line Input	Mini jack (monaural)
Line Output	No* *Supported by future version-up
Network Port	10BASE-T/100BASE-TX (RJ-45)
Alarm Input (Sensor Input)	x2, make contact, break contact
Alarm Output	x2, Max. AC 12 V/DC 24 V, 0.4 A (solid-state relay outputs electrically isolated from the camera)
Wireless LAN Terminal	Yes
Card Slots	SD x1
Confirmed SD Card Type	SDHC/SDXC (Max. 128 GB)
SD OFF Switch	Yes
General	
Power Requirements	IEEE 802.3af compliant (PoE) Class 3, DC 12 V ± 10 %, AC 24 V ± 20 %, 50/60 Hz
Power Consumption	Max. 12.95 W
Operating Temperature	-40 °C to +50 °C (-40 °F to +122 °F)
Cold Start Temperature	-40 °C to +50 °C (-40 °F to +122 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Humidity	20 % to 90 % (no condensation)
Storage Humidity	20 % to 80 % (no condensation)
Built-in Heater	Yes
Dimensions (W x H x D)	ø190 x 146.7 mm (ø7 1/2 inches x 5 7/8 inches)
Mass	Approx. 1900 g (4 lb 3 oz) Approx. 2100 g (4 lb 10 oz) (with Bracket)
External Material	Upper case: AL Die-cast Lower case: AL Die-cast Dome cover: PC Cap: PC
External Color	Munsell 4.4BG 8.4/0.2 (White)
Fire Retardant	UL2044
Safety Regulations	JATE Technical Standard (LAN) UL2044, IEC/EN60950-1 (CB) VCCI (Class A), FCC (Class A), IC (Class A) Emission: EN55022 (Class A) Immunity: EN55024 + EN50130-4 Emission: AS/NZS CISPR22 (Class A) MSIP EMC-TR
Supplied Accessories	Bracket (1), Template (1), Wrench (1), Screw (M4 x 8) (1), Sealing rubber (1), Multi connector cable (1), Read This First (1), Safety Regulations (1), Warranty booklet (1)
Optional Accessories	IFU-WLM3 (USB wireless LAN module)

DIMENSION

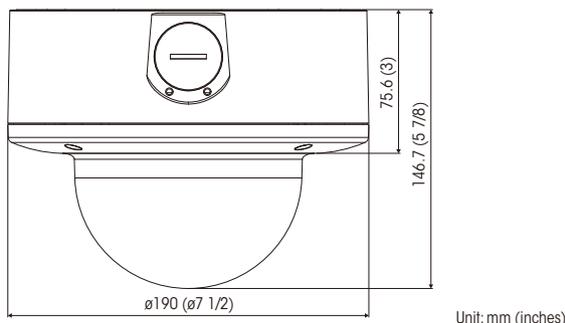

©2015 Sony Corporation. All rights reserved.
 Reproduction in whole or in part without permission is prohibited.
 Features and specifications are subject to change without notice.
 The values for mass and dimension are approximate.
 SONY and Exmor R are trademarks of Sony Corporation.
 All other trademarks are the property of their respective owners.

Distributed by