

Compact and Affordable HD Security Camera

- Excellent 720p HD picture quality, supporting H.264 at 30 fps
- 1.3 Megapixel (1280 x 960) maximum resolution
- Three codecs (H.264, MPEG-4, JPEG) and a dual streaming capability
- 1/3.8 type progressive scan CMOS sensor incorporated to realize high image quality




KEY FEATURES

 Compact and stylish design for discreet surveillance solution.



- Electrical Day/Night function to switch to Day or Night mode depending on the light level.
- Stream Squared function to send two 4:3 aspect ratio videos in user-selectable resolutions up to SD simultaneously (Low-cost solution to replace two SD cameras located in a line).

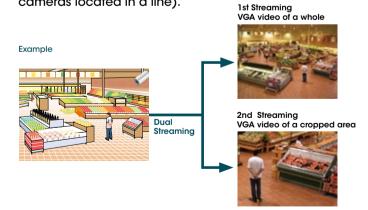

Intelligent Motion Detection that supports DEPA.




- · Analog monitor output (AV mini jack).
- Powered by PoE (Power over Ethernet) for simple installation.
- Recording software (RealShot Manager Lite) is bundled to start recording and monitoring instantly.
- ONVIF (Open Network Video Interface Forum) Version 1.01 conformance that ensures greater interoperability and more flexibility in building multiple-vendor systems.



SPECIFICATIONS

	SNC-CH110
Camera	
Image device	1/3.8 type CMOS sensor
Minimum illumination	5.0 lx / AGC 30dB / 50IRE [IP]
Number of effective pixels (H x V)	1.3Megapixel (1296×985)
Electronic shutter speed	1/2 s to 1/10000 s
Gain control	Auto
Exposure control	Auto, EV Compensation, Auto Slow Shutter
White balance mode	Auto(ATW, ATW-PRO), Preset, One-push WB, Manual
Lens type	fixed
Horizontal viewing angle	
Focal length	80.7 degrees f=2.34
F-number	F2.8
Minimum objects distance Camera Features	500 mm
	Vos (alastriant DMI)
Day/Night	Yes (electrical D/N)
Noise reduction	Yes
Image Codec image size (H x V)	1920v040 1920v790 1094v742 1094v574 748v574 790v574 704v574 900v400 790v400
Codec image size (H x v)	1280x960,1280x720,1024x768,1024x576,768x576,720x576,704x576,800x480,720x480,640x480,640x368,384x288,352x288,320x240,320x192,176x144
Video compression format	H.264, MPEG-4, JPEG
Codec streaming capability	Dual streaming
Maximum frame rate	JPEG / MPEG-4 / H.264: 30fps (1280×960 / 1280x720)
Scene Analytics	31 EO / Mil EO 4 / 11.204. 001p3 (1200×700 / 1200×720)
Intelligent motion detection	Yes
Network	100
Protocols	IPv4, IPv6, TCP, UDP, ARP, ICMP, IGMP, HTTP, HTTPS, FTP (client), SMTP, DHCP, DNS,NTP, RTP/RTCP, RTSP, SNMP (MIB-2)
ONVIF conformance	Yes (Version 1.01)
Number of clients	5
Authentication	IEEE802.1X
Analog Video Output	
Signal system	NTSC / PAL
Interface	
Ethernet	10BASE-T / 100BASE-TX (RJ-45)
Analog monitor output	AV Mini Jack
Sensor input	хl
General	
Mass	100 g (3.5 oz)
Dimensions	ø 44 x 93 mm (ø 1 3/4 x 3 3/4 inches)
Power requirements	PoE
Power consumption	2.4W
Working temperature	0 °C to 50 °C (32°F to 122°F)
Storage temperature	-20 °C to +60 °C (-4°F to +140°F)
Safety regulation	UL2044, FCC 15B Class B, IC Class B, IEC60950-1, EN55022(B)+EN55024+EN50130-4, VCCI Class B, C-Tick Class B
System Requirements	
Operating system	WindowsXP, WindowsVista (32bit), Windows7 (32bit)
Processor	Intel Core2 Duo 2 GHz or higher
Memory	1 GB or more
Web browser	Microsoft Internet Explorer Ver6.0, 7.0, or 8.0 Firefox Ver.3.5 (Plug-in free viewer only) Safari Ver.4.0 (Plug-in free viewer only) Google Chrome Ver.4.0 (Plug-in free viewer only)
Supplied Accessories	
	CD-ROM (User's Guide, SNC Toolbox-RSM-Lite), Installation manual, B&P warranty booklet, FrontSheet (with logo), FrontSheet (without logo), Sensor input cable

SYSTEM CONFIGURATION

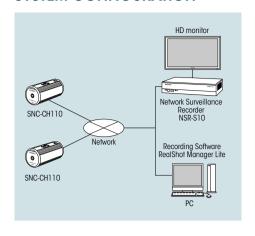



DIMENSIONS

Unit: mm (inches)









Distributed by

© 2010 Sony Corporation. All rights reserved.

Reproduction in whole or in part without written permission is prohibited.

Features and specifications are subject to change without notice.

The values for weight and dimension are approximate.

SONY and "make.believe" are registered trademarks of Sony Corporation.

IPELA is a trademark of Sony Corporation.

Windows, XP, and Vista are trademarks of Microsoft Corporation.

Core is a trademark of Intel Corporation.

All other trademarks are the property of their respective owners.

 $^{^*}$ The SNC-CH110 includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (http://www.openssl.org/).